



DATASHEET

PAN SUBWOOFER P SW-118



The **Pan Subwoofer P SW-118** is a powerful subwoofer in a high-quality birch plywood enclosure with textured coating. In addition to the passive variant, an active version is also available.

The **P SW-118** features an attractive design as well as a pure, precise and deep bass reproduction. The **P SW-118** can be operated individually or in various cardioid configurations.

A powerful DSP power amplifier is required to operate the **P SW-118**.

The **P SW-118** is equipped with a 18" HQ woofer driver. On the top, it is possible to attach a distance bar by means of a screw thread insert. The enclosure is designed as a direct radiating speaker and is available in all RAL colours. The standard colour is black with textured coating.

EQUIPMENT / OPTIONS



See last page for explanation of the symbols.

APPLICATIONS

Churches, museums, live PA, sports facilities, legislative buildings, conference rooms, lecture halls, shopping centres, A/V presentation rooms, immersive sound, surround applications

FEATURES

Pure and deep bass reproduction, slim and unobtrusive design.

ACCESSORIES

For the **Pan Subwoofer** series, there is a wide range of accessories for fixed installation and mobile use.

All **Pan Subwoofer** loudspeakers are designed, developed and manufactured in Germany by Pan Acoustics from high quality materials and according to strict criteria.



TECHNICAL DATA P SW-118 (PASSIVE)

ACOUSTIC PROPERTIES






Configuration:	Direct radiating subwoofer
Lower cut-off frequency:	35 Hz
Driver:	1 x 18" HQ
Rated power:	4000 W (peak) / 2000 W (programme) / 1000 W (AES)
Recommended amplifier:	DSP power amplifier
Sensitivity:	98 dB 1 W / 1 m
Maximum SPL:	133 dB* (peak) @ 1 m
Impedance:	8 ohms
Connections:	2 x NL4 (assignment: 1+/1-)
Operating temperature:	-10 °C to +50 °C ambient temperature

MECHANICAL PROPERTIES

Enclosure:	18 mm birch plywood
Colour:	RAL 9005 (black), textured coating RAL 9010 (white), textured coating
Dimensions (H x W x D):	538 x 530 x 770 [mm]
Weight:	41 kg

*Under anechoic half-space conditions with DSP settings.
Lower cut-off frequency: -10 dB under anechoic halfspace-conditions.

TECHNICAL DRAWING P SW-118 (PASSIVE)

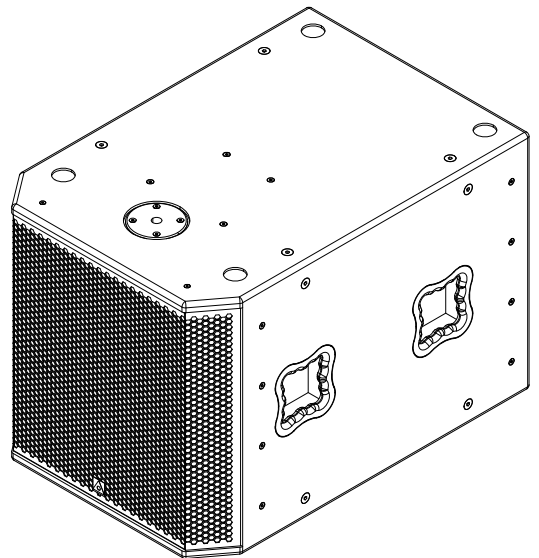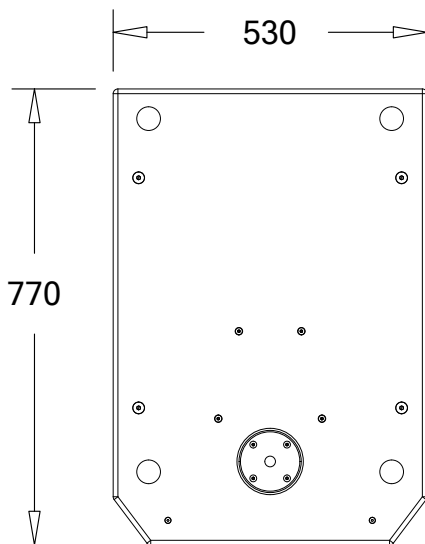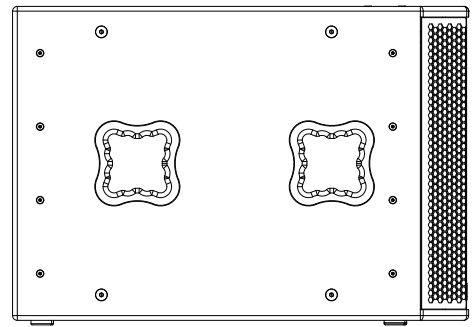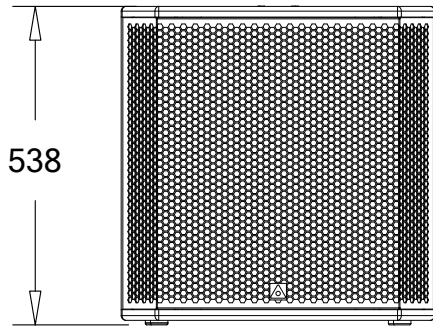

P SW-118 (passive)

EQUIPMENT / OPTIONS AT A GLANCE – PAN SUBWOOFER SERIES



Customised coating/colouring
within the RAL colour range. Other colour systems such as RAL design, Pantone, etc. are available on request.



Analogue audio inputs
with balanced signal routing.



Digital Dante audio network
including AES67 support.
Redundant network structure with Pan Net control.



Pilot tone evaluation for integration in SAA/ENS systems.



General Purpose Output (GPO)
Switchable contact, e.g. for status request via downstream media control.



Digital audio inputs support
2 x AES/EBU (AES3).



Pan Net
Pan Acoustics' own control and monitoring protocol.



Priority switching
Automatic switching of the audio inputs, e.g. between programme and announcement.



Accessories such as wall, tripod and ceiling mounts, different interfaces, connection cables, weather protection hoods and connection sets are available.



Looks good, sounds good.
Pan Acoustics' products are defined by natural sound and attractive design.

Some equipment features cannot be combined. For information about which features can be combined with each other, please send an e-mail to sales@pan-acoustics.de.

Our quality promise

Pan Acoustics stands by its products and gives up to **10 years warranty** on its loudspeakers for any material or manufacturing defects. New products manufactured in accordance with protection classes IP54 and IP65 as well as digital audio interfaces (Dante®) from Audinate Pty Ltd and rechargeable batteries are excluded from the 10-year warranty. A warranty period of 3 years is granted for loudspeakers in accordance with protection classes IP54 and IP65.

