

Unite CDD-8/4

Cockpit Desktop Charger



Unite CDD-8/4 – Front view



Unite CDD-8/4 – Rear view



Unite CDD-8/4 with Unite transmitters and receivers (not included in the delivery)

FEATURES

- Desktop charger for Unite transmitters and receivers with 8 charging compartments – 4 of them are compatible with the Unite TH handheld transmitter
- Buttons for pairing process
- Status indicator for pairing process
- Separate power indicator
- Reset button
- Ethernet connection for:
 - Firmware update
 - Pairing
 - Maintenance and monitoring
- USB connection for:
 - Pairing
 - Charging
- 12 V DC connection for power supply unit

TECHNICAL SPECIFICATIONS

Power supply unit

XP Power VEC50US12 for Unite CDD-8/4

AC input..... 90 – 264 V, 47 – 63 Hz
Nominal current..... 1 A @ 115 V AC, 0.7 @ 230 V AC
Power consumption..... 50 W with 8 charging compartments
Output voltage..... 12 V DC, 4.17 A

Charger

Max. charging time..... approx. 4 hrs.
Connections..... Ethernet
USB Typ C (USB 2.0, 0.5 A)
Temperature range
in operation..... 0 to +30 °C
storage..... -20 to +50 °C
Relative air humidity..... 0 to 90%
Dimensions (W x H x D)
incl. rubber pads..... 147.5 x 75.5 x 163.5 mm
Weight..... 1080 g
Charging compartments... 8 of which are 4 combined charging compartments for handheld / bodypack devices

APPLICATIONS

The Unite CDD-8/4 is a multifunctional device, which is used to charge the batteries integrated in the Unite transmitters and receivers as well as to store and transmit the pairing information (channel name and group ID) from the transmitter to the receiver. For optimal security against unauthorised listening an audio encryption key will be generated inside the Unite CDD-8/4 and transmitted to the transmitters and receivers during the pairing process.

The Unite CDD-8/4 can be integrated into a network by using the Ethernet connection. With the Unite Manager software the desktop charger can be monitored remotely. Furthermore, firmware updates and configurations can be carried out via this software.

The desktop charger can be attached to a table top via two holes at the bottom.

The Unite CDD-8/4 desktop charger provides a maximum of 8 charging compartments, 4 of them are compatible with the Unite TH handheld transmitter. The charging state of the batteries is displayed via the status indicator on the appropriate transmitter or receiver.

VERSION

Unite CDD-8/4 Cockpit desktop charger for a maximum of 8 Unite bodypack transmitters / receivers.
4 of the 8 charging compartments are compatible with the Unite TH handheld transmitter. Network connection, USB-C connection, incl. power supply unit . . Order # 708.488


SUPPLIED ACCESSORIES

- XP Power VEC50US12 power supply unit
- Quick start guide

Unite CDD-8/4

DIMENSIONS

Power supply unit

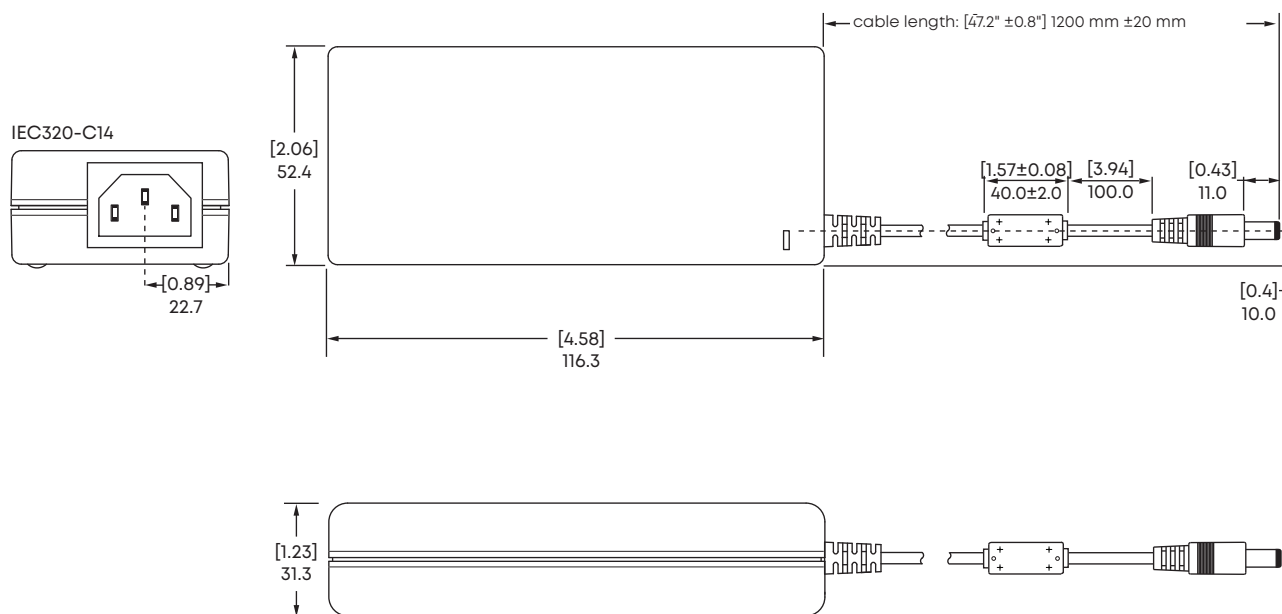


All dimensions in mm and [inch].

Unite CDD-8/4

DIMENSIONS

Charger with Unite devices

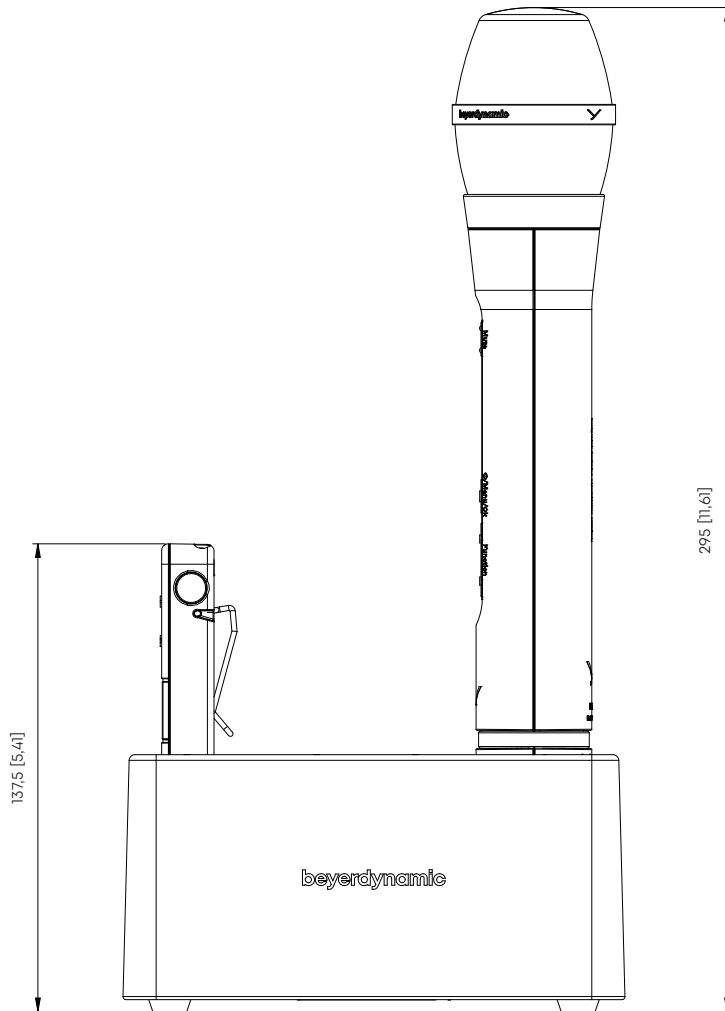

All dimensions in mm and [inch].

3 of 6

beyerdynamic GmbH & Co. KG
Theresienstr. 8 · 74072 Heilbronn – Germany
Tel. +49 (0) 71 31 / 617 – 300 · info@beyerdynamic.de · www.beyerdynamic.com


For further distributors worldwide, please go to www.beyerdynamic.com
Non-contractual illustrations. Contents subject to change without notice. E1 / Unite CDD-8/4 (02.20)

beyerdynamic

Unite CDD-8/4

DIMENSIONS

Charger without devices

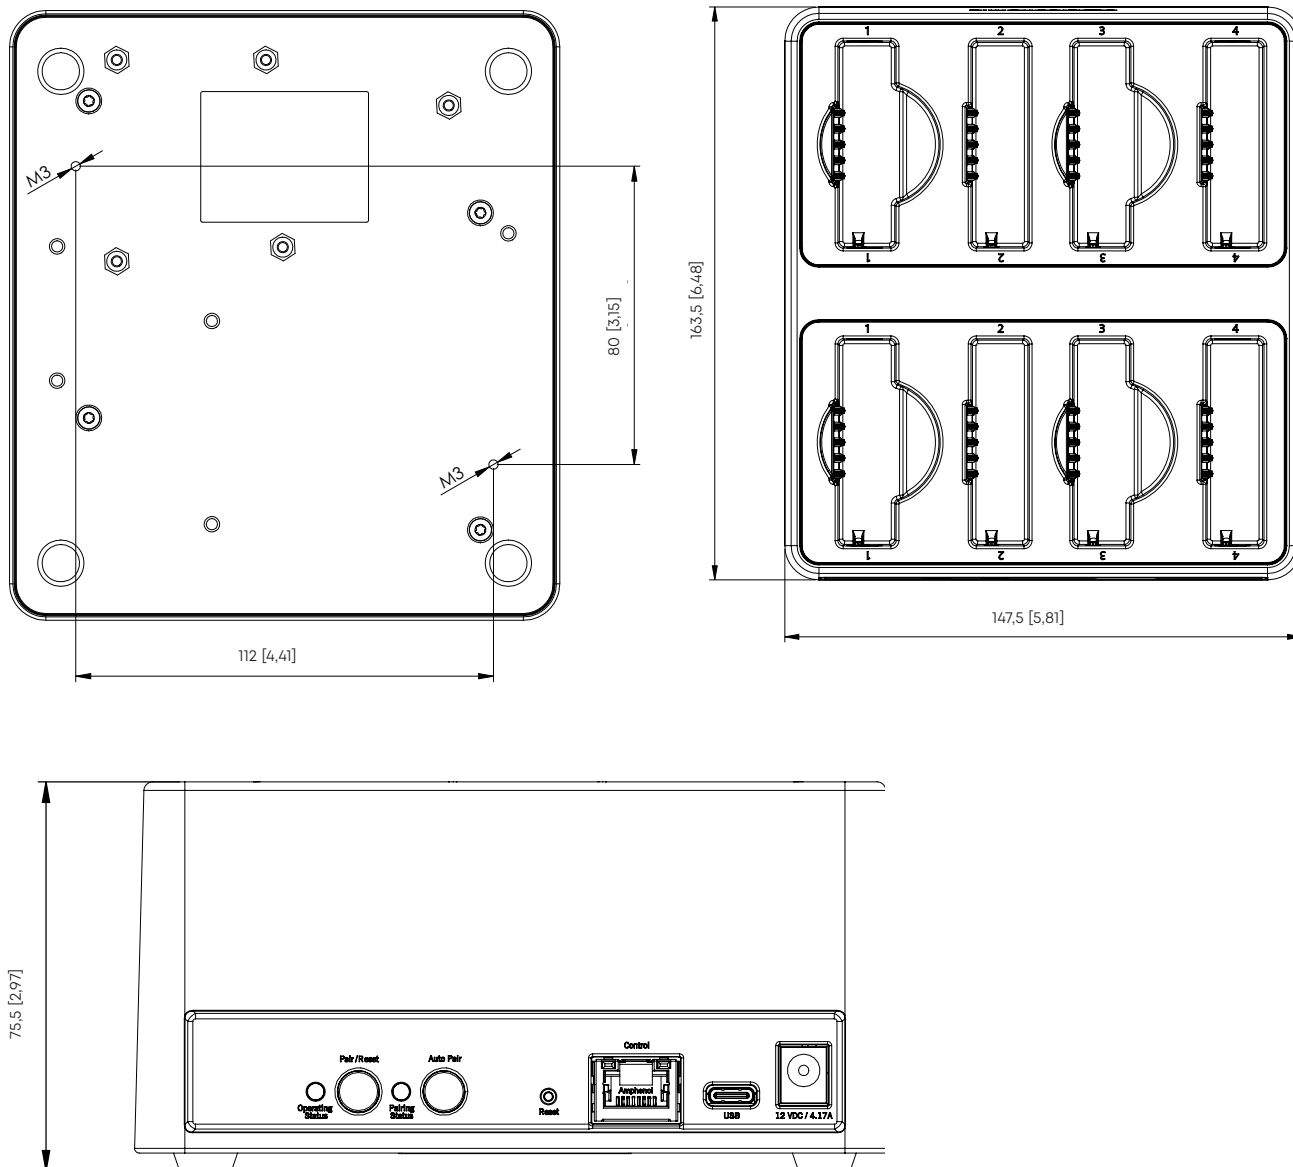


All dimensions in mm and [inch].

Unite CDD-8/4

DRILLING TEMPLATE

Bottom view of the device. Outer edges are the external dimensions of the charger. The template is rotationally symmetrical. Scale 1 : 1

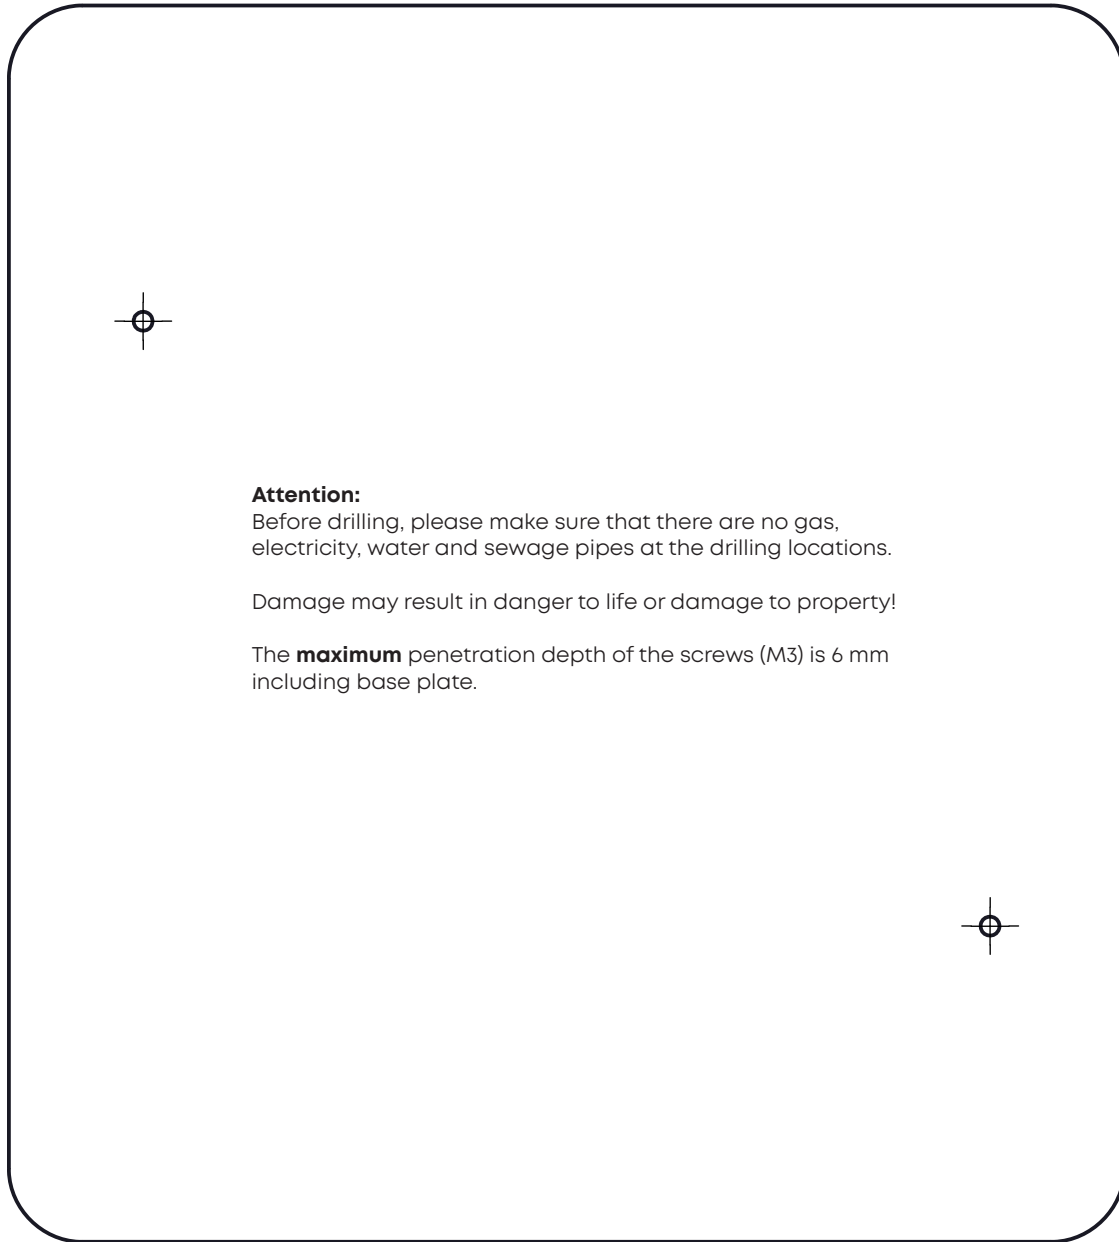


Rear of the device (connections)

Unite CDD-8/4

DRILLING TEMPLATE

Top view of the device. Outer edges are the external dimensions of the charger. The template is rotationally symmetrical. Scale 1 : 1

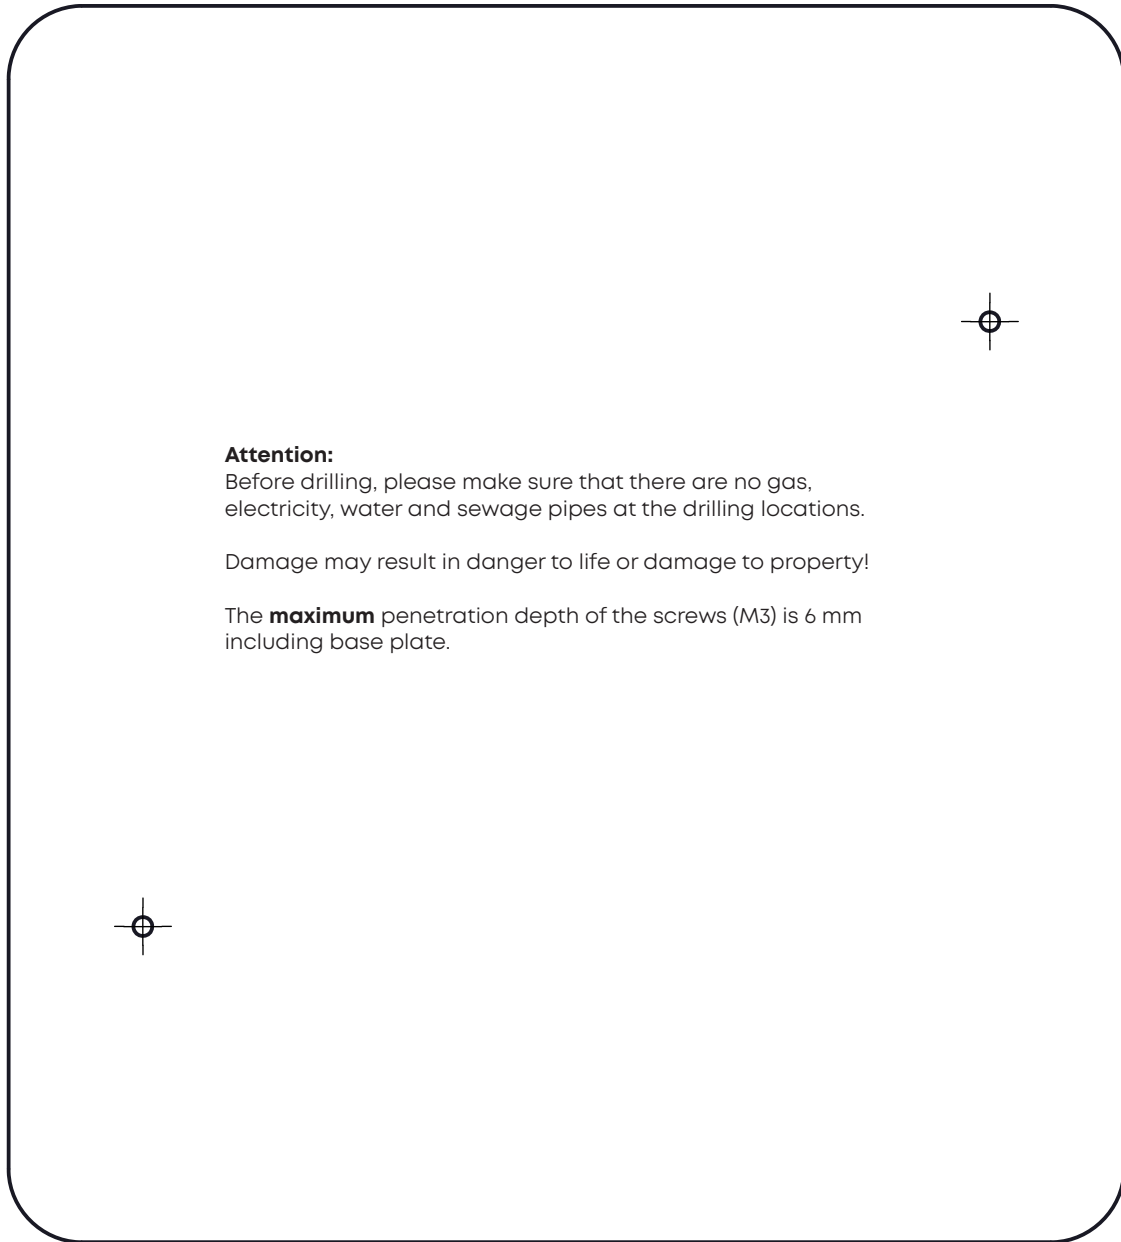

Rear of the device (connections)