

MAXHUB




Product Specification

MAXHUB

I. Product Features

1. Plug and Play: Integrated design that becomes instantly operational after booting
2. A New Horizon: Featuring a 120-degree FOV, with a 1/2.3-inch 12MP sensor
3. Digital Zooming: 5x
4. Presets: 3 Zooming Presets that instantly sets up for conference
5. Built-in Speaker: Satisfies the need for larger spaces
6. Built-in Microphone: Six-element MEMS microphone array with high sensitivity and 8 meters of voice pickup range
7. Clearer Voice: Noise reduction, echo cancellation, anti-reverberation, built-in AGC algorithm that enhances voice collection
8. Wireless Connection: Dual wi-fi module support wireless screen-sharing as well as network connection. Share the screens wirelessly via MAXHUB Share or screen-share dongles
9. Broad Compatibility: Supports connecting with a laptop, working as a camera, speaker, and microphone
10. Flexible installation: Mount it on a wall or put it on a desk

II. Dimensions

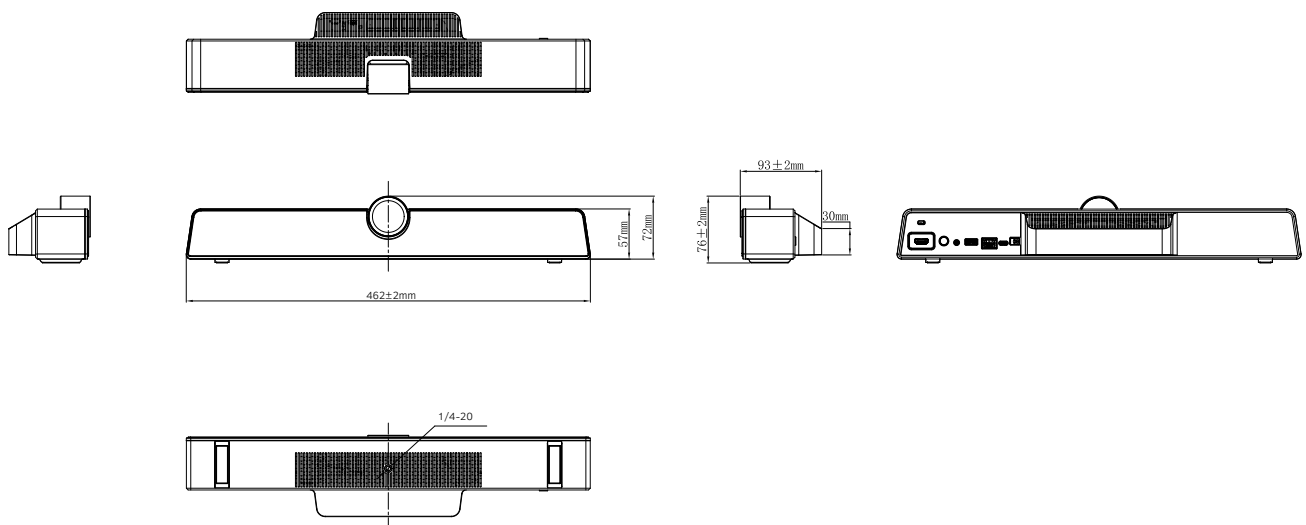

MAXHUB

III. Camera

Pixel	12M
Resolution and Frame Rate	H.264/MJPEG:
	(1)3840×2160 (2)2560×1440 (3)1920×1080
	(4)1280×720 (5)1024×576 (6)960×540
	(7)800×600 (8)640×480 (9)640×360
	(10)480×270 (11)352×288 (12)320×240
	(13)320×180 (14)176×144 (15)160×120
	(16)160×90
	YUV2 :
	(1)640×480 (2)640×360 (3)480×270
	(4)352×288 (5)320×240 (6)320×180
	(7)176×144 (8)160×120 (9)160×90
Output Format	H.264/MJPEG/YUY2
Field of View	FOV 120°(D)
Adjustable Angle	Up and down 15 by manual adjustment
Focus mode	Fixed focus
Focus distance	1m

IV. Audio

Sound Channel	1
Output Power	1×8W

V. Microphone

Quantity	6
Voice Pickup Range	0~8m

VI. Wi-Fi

Wireless Communication Protocol	802.11 a/b/g/n/ac
Operation Frequency	2.4GHz/5GHz
Operation Distance	0~10m

MAXHUB

VII. Power

Power Requirements	12V 3A
Overall Power(Max.)	36W
Standby Power	≤0.5W

VIII. I/O Ports

USB Type-C	1
USB3.0	1
AUDIO IN/OUT	1
HDMI OUT	1
DC 2.0	1
RJ45	1

IX. Physical Specifications

Dimension L×H×D	462×76×93 mm
Dimension (package) L×W×H	540×160×170 mm
Net Weight	1.026kg
Gross Weight	2.330kg (1 pc)
	11.730kg (4 pcs)

X. Accessories

HDMI Cable	×1 (1.5 meters)
Remote Control	×1
Battery	×2 (AAA)
Power Adapter	×1
Wall-mounted Components	×1
Peeping Cover	×1
USB Cable	×1

MAXHUB

XI. Environment

Operating Temperature	0°C - 40°C
Operating Humidity	10% - 90%RH
Storage Temperature	-20°C -60°C
Storage Humidity	10% - 90%RH
Altitude	Below 5000 meters

XII. Statement

Size and weight may vary by configuration and manufacturing process. Please refer to the actual product.

The product images are for illustrative purposes only and may slightly differ in appearance, colour, size, etc. from the actual product.

The description, illustrations, etc. in the document may subject to change in accordance with the latest product specification and performance.

Should the change as mentioned above in the document become necessary, the document may be updated without written notice.



NOTICE: The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.